




SPRAYER SERIES

WHEN ONLY THE BEST WILL DO

The Trailtech Sprayer series is built to the needs of the applicator. Sprayer trailers are manufactured to offer the applicator versatility and convenience of operation in order to maximize operator efforts.

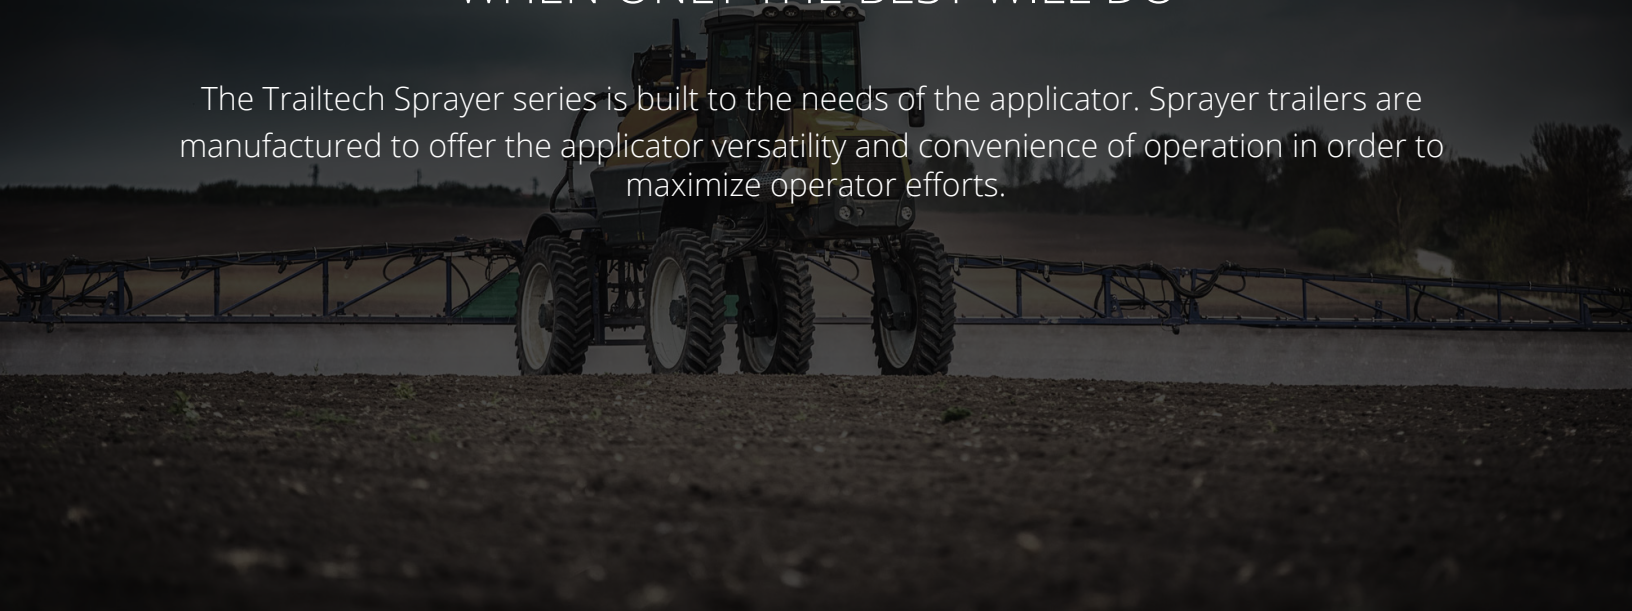

SPECIFICATIONS

Features	HC220FW	HC220PH
Main Frame	14" I-Beam	14" I-Beam
Crossmembers	Structural Tubing	Structural Tubing
Axles	(2) 20,000 lb Air Braking (w/ABS)	(2) 20,000 lb Air Braking (w/ABS)
Fixed Width	143"	143"
Pintle Hitch	Standard	---
Fifth-wheel Hitch	---	Standard
Tires	215/75R17.5 Radial	215/75R17.5 Radial
Options	235/75R17.5 Radial	235/75R17.5 Radial
Curb Weight	9039 lb	11,012 lb

All models have the following standard feature: LED Lights, Dovetail.

FEATURES

Dovetail

The dovetail is positioned to eliminate the need for ramps allowing for quick loading and unloading of your sprayer. The heavy-duty construction is designed to carry all popular sprayer models.

Air Brakes

These trailers come equipped with air brakes installed in compliance with Canadian Motor Vehicle Safety Standards. Each trailer is tested to the rigorous section 121 standard for timing and brake release.

Extra Wide Carrying Bed

The extra wide carrying bed is specially designed to carry high capacity water tanks. Axles, tires, suspensions and wheels are carefully matched to the trailer to ensure proper weight carrying capacity of each unit.

Hitches

Models are available with either pintle or fifth-wheel hitches allowing you to match any tow vehicle requirements.

LED Lighting

LED lighting, which allows for faster response time and brighter lights for safety, is standard on all models

Drive Over Fenders

Our engineers have designed the fenders on our sprayer models to support the weight of your sprayer when loading.

OPTIONS

235/75R17.5 Tires

Available on:

HC220PH and HC220FW

