



INDUSTRIAL

SERIES

**STRONG AND
DEPENDABLE**




*Shown with optional wheel simulators



TRAILTECH INC. BOX 988, GRAVELBOURG, SK, CANADA S0H 1X0
P: (306) 648-3158 F: (306) 648-3305

WWW.TRAILTECH.COM

FEATURES

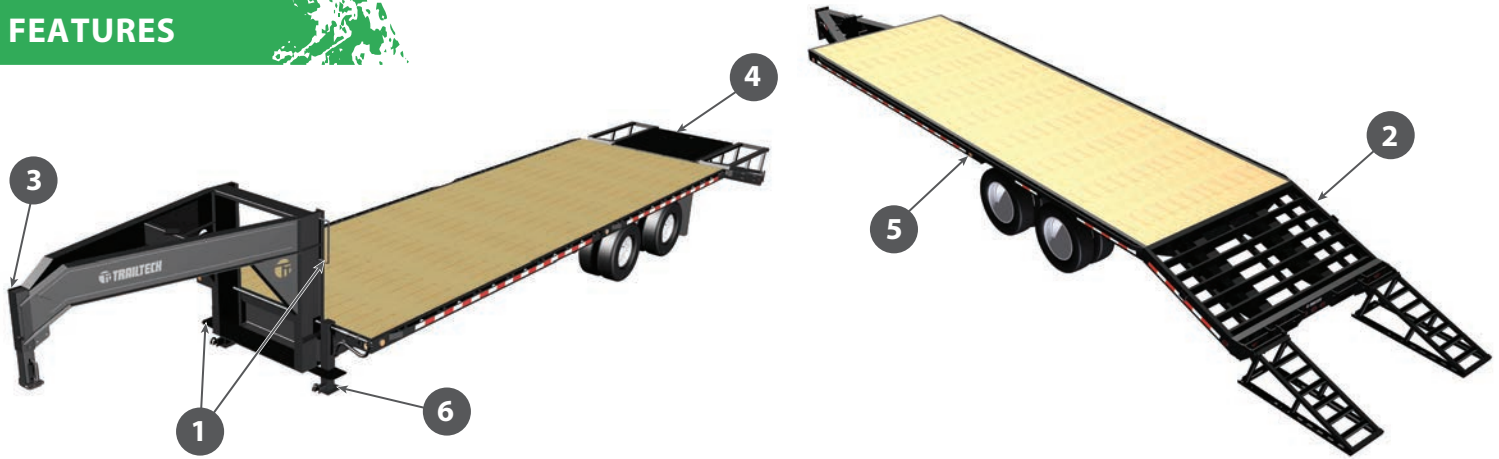

Step & Grab Handles

Gooseneck step and grab handles make it easier and safer to get up onto the trailer deck.



Open Cleated Beavertail

The open cleated beavertail eliminates the slippage common on wooden beavertails.



Drop Gooseneck & Toolbox

The raised height of the gooseneck accommodates newer trucks with higher boxes.



Spring Assisted Flip Up Center

It is now easier than ever to extend the length of your deck with the spring assisted flip up centre.



LED Lighting

LED lighting, which allows for faster response time and brighter lights for safety, is standard on all models.



Dual Drop Foot Jacks

Dual HD drop foot jacks and expanded metal basket are standard on all goosenecks for increased stability, lift and storage capacity.

SPECIFICATIONS

Features	TD210GNBT 26'	TD210PHBT 26'	TD220PHBT 26'	TD220PHILT 30'
Main Frame	12" I-beam	12" I-beam	12" I-beam	12" I-beam
Crossmembers	3 x 2 x .125	3 x 2 x .125	4" I-Beam	4" I-Beam
Axles	(2) 10,000 lb Dual Electric Braking	(2) 10,000 lb Dual Electric Braking	(2) 20,000 lb Dual Air Braking (w/ABS)	(2) 20,000 lb Dual Air Braking (w/ABS)
Hitch	Gooseneck 2 5/16" Ball Coupler	Adjustable Lunette Eye	Adjustable Lunette Eye	Adjustable Lunette Eye
Jack	Double	Single	Two Speed	Two Speed Landing Gear
Deck Height	37"	37"	41"	41"
Beavertail c/w Double Pivot Ramps	Standard Spring Assisted Flip Up Center	Standard	Standard	Hinged Beavertail Only
Tires (Radial)	ST235/80R16 Radial	ST235/80R16 Radial	255/70R22.5 Radial	255/70R22.5 Radial
Options	Gooseneck King Pin	Spring Assisted Flip Up Center, 2 Speed Jack/Expanded Metal in Hitch	-	-
Curb Weight	5930 lb	5534 lb	9127 lb	13,000 lb

* All models have the following standard features: LED Lights, Rub rail w/stake pockets, 102" Overall width.